


Celestial Energy-3340-0.5C

昆宇电源
COSPOWERS

应用领域

- 用户侧C&I工商业储能的峰谷套利,后备电源;
- 风光新能源电站的削峰填谷平滑输出;
- 电网侧调频调峰,配电网变压器容量扩容

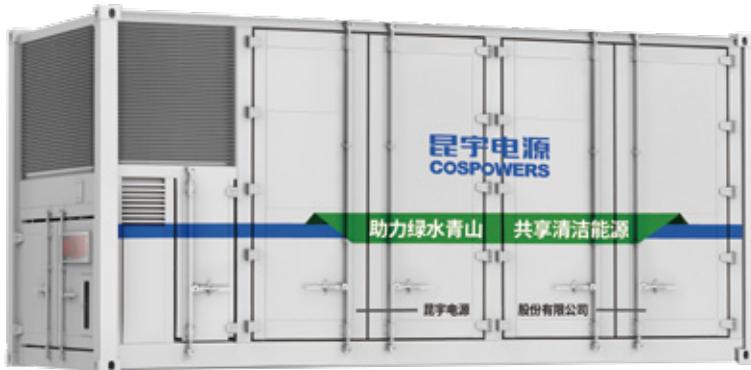

模块化
标准设计



多重
保护系统



交直流一体
安装调试高效



智能运维

参数/型号		Celestial Energy-3340-0.5C
直流侧参数	电芯容量	314Ah (LFP)
	模块成组	1P52S
	单簇模块数量	8pcs
	电池簇数量	8pcs
	电池系统电量	3340kWh
	电压范围	1164.8~1476.8V
交流侧参数	额定交流功率	8*200kW
	额定电网电压	AC690V
	接线方式	3W+PE
	额定电网频率	50/60Hz
	隔离方式	无隔离变压器
系统级参数	工作温度	-30~55°C
	环境湿度	0~95% (无凝露)
	工作海拔	2000m
	通讯方式	以太网、RS485、可选4G/5G移动通信
	防护等级	IP54
	冷却方式	液冷
	噪音	≤75dB
	消防	七氟丙烷/全氟己酮舱级/气溶胶+水消防+可燃气体探测+防爆通风系统
	尺寸(W*D*H)	6058*2438*2896mm
	重量	30t
符合标准	Cluster	IEC62619、UL1973、UL9540A、UN38.3
	PCS	UL1741、EN50549、VDE4110、VDE4120、VDE4130、GB/T34120、GB/T36547等



昆宇电源股份有限公司

网址:WWW.COSPOWERS.COM

地址:山东省东营市东营区东七路28号

电话:0546-7768891


版权及最终解释权归昆宇电源股份有限公司所有

Celestial Energy-3340-0.5C

COSPOWERS

Application Field

- Post-meter electricity market, peak-valley arbitrage and backup power supply of C&I (commercial and industrial) energy storage on the customer side.
- Peak shaving and valley filling for smooth output of wind and solar new energy power stations.
- Grid frequency regulation and peak load regulation in the pre-meter electricity market, as well as capacity expansion of distribution network transformers.

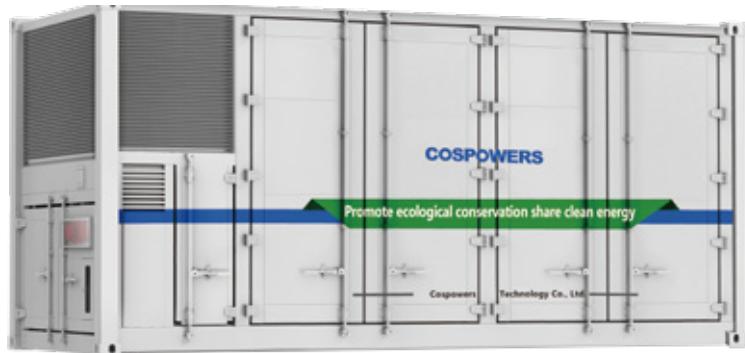

Modular Standard Design



Multiple Protection Systems



Efficient Installation and Commissioning of AC/DC Integrated Systems



Intelligent Operation and Maintenance

Parameters/ Model		Celestial Energy-3340-0.5C
DC side parameters	Cell Capacity	314Ah(LFP)
	Module Structure	1P52S
	Module quantity in single cluster	8pcs
	Nos. of Battery Clusters	8pcs
	Battery system power	3340kWh
AC side parameters	Voltage Range	1164.8~1476.8V
	Rated grid voltage	8*200kW
	Wiring Mode	AC690V
	Rated grid frequency	3W+PE
	Rated AC power	50/60Hz
System level parameters	Isolation mode	No isolation transformer
	Operating temperature	-30~55°C
	Ambient Humidity	0~95%(no condensation)
	Working Altitude	2000m
	Communication method	Ethernet, RS485, Optional 4G/5G Mobile Communication
	Protection level	IP54
	Cooling Method	Liquid cooling
	Noise	≤75dB
	Fire protection system	Heptafluoropropane/Perfluorohexane compartment level/Aerosol fire protection + combustible gas detection + explosion-proof ventilation system
	Size(W*D*H)	6058*2438*2896mm
Compliant with Standards	Weight	30t
	Cluster	IEC62619、UL1973、UL9540A、UN38.3
	PCS	UL1741、EN50549、VDE4110、VDE4120、VDE4130、GB/T34120、GB/T36547...



Cospowers Technology Co., Ltd.

W:WWW.COSPOWERS.COM

A:No.28, Dongqi Road, Dongying City, Shandong Province, P.R.C.

T:+86-546-7768891

Copyright and final interpretation rights belong to Cospowers Technology Co., Ltd.